


I have a 4K screen, and I set it to 200 scaling. I had to remove the original configuration files found in my appdata folder. It's found at:


C:\Users**<your username>**\AppData\Local\Utilities4D.

Just remove all of the files in that folder. Then start up the dictation box as normal. Then do the following:


1. Set the size of the form as you want it.
2. The font menu choices probably are a bit hidden, you should still be able to say "font", or click on it. See illustration 1.

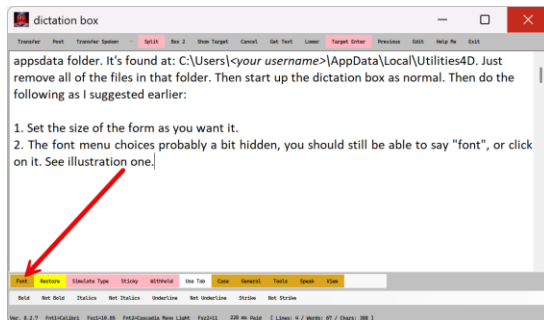


3. Adjust the text inside the buttons so that you can see all of the text. See illustration 2.

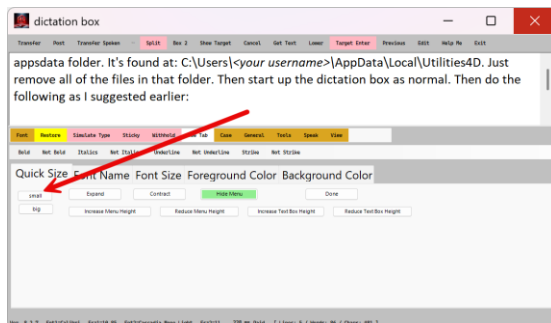



4. Choose the font name that you want. See illustration 3. Press the apply button when you're satisfied.

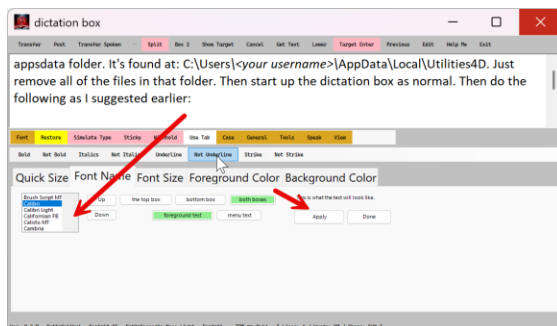

5. Then choose the font size so that you can see everything in the top menu from transfer through exit. Make sure that you have clicked on the "menu text" button. Then choose the size, I am using 4. Then apply that.

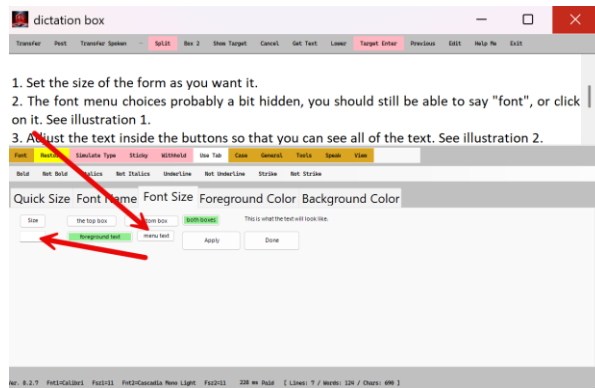

6. Now, make sure the space that is above and below the menu text allows for everything to be seen without being clipped, but not too big as to waste space. This is found in the quick size menu choice. Just increase and decrease the menu height until you are happy, then press the done button.

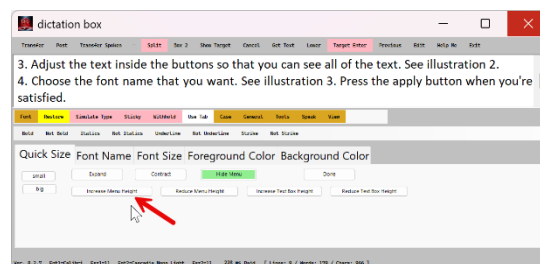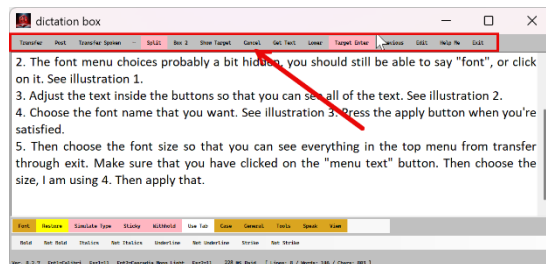

7. Finally, under General, click on the save configuration. These settings can then be recalled when needed in the future.

